



3.1 STEEL ROPE SYSTEM/PVC

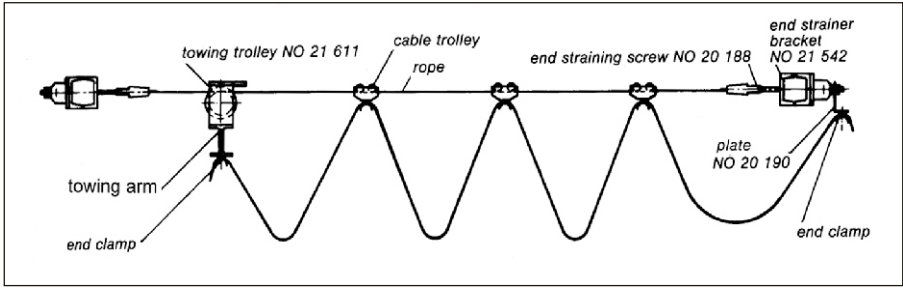


PART NO	d	D	MIN BRAKING STRENGTH		PERM TENSILE STRENGTH		WEIGHT (kg/m)
			F2(kN)	F2(kp)	F2(kN)	F2(kp)	
3-SF/0102	4	6	14.5	1480	3.6	370	0.094
3-SF/0103	6	8	20.3	2060	5.1	515	0.160

3-SF/0200 - END STRAINING SCREW

Material Ropelock - galvanizedsteel
Screw - galvanizedsteel
Nut - galvanizedsteel
Ropecamp - galvanizedsteel

Weight 0.7kg





3-SF/0300 - END CLAMP

Material Buttstrap - galvanizedsteel
Support - plastic
Screw - galvanizedsteel
Nut - galvanizedsteel
Split nut - plastic

Weight 0.220kg

Application: The cable clip is fastened with straining screw to the end strainer bracket. Suitable for fastening fat cables with a minimum width of 54mm and a maximum thickness of 25mm. The split nuts allow the flat cables to be clamped by hand.





3-SF/0400 - CABLE CARRIER

Material Casing - plastic
Support - plastic
Runner - nylon
Shaft - stainless steel
Screw - galvanized steel
Nut - galvanized steel
Split nut - plastic

Weight 0.100kg
Load approx 6kg

Application: This cable trolley is designed for flat cables with a maximum width of 44mm and a maximum thickness of 20mm. Suitable for one or more flat cables. The split nuts allow the flat cables to be clamped by hand.




3-SF/0500 - MASTER CARRIER


Material Casing - plastic
Runner - nylon
Bolt - stainless steel
Support - plastic
Screw - galvanized steel
Nut - galvanized steel
Split nut - plastic

Weight 0.380kg

Application: The master carrier ensures the correct guidance of flat cable and flat cable trolley. The maximum width of the cable can be 54mm. The maximum thickness 25mm. The split nuts allow the fat cables to be clamped by hand.



3.1 STEEL ROPE SYSTEM/PVC





3-SR/0301 – CABLE CARRIER

- Material Casing - plastic
 Runner - nylon
 Shaft - stainless steel
 Hook - galvanized steel
 Nut - galvanized steel

Weight 0.035kg
 Load approximately 3kg

Application: This cable trolley is used for light weight applications (for example on electric hoists, electric chain hoists as well as for gas and oxygen hoses)





3-SR/0302 – CABLE CARRIER

- Material Casing - plastic
 Runner - nylon
 Shaft - stainless steel
 Hook - galvanized steel
 Nut - galvanized steel

Weight 0.060kg
 Load approximately 6kg

Application: This cable trolley is also used for light weight applications (for example on electric hoists, electric chain hoists as well as for gas and oxygen hoses), but it can also be used for heavier loads.




3-SR/0200 – MASTER CARRIER

- Material Casing - nylon
 Runner - nylon
 Bolt - stainless steel
 Connecting plate - nylon
 Screw - galvanized steel
 Nut - galvanized steel



Weight 0.310kg

Application: The master carrier ensures the correct guidance of cable and cable trolley.



3-SR/0304-* - CABLE COLLAR FOR ROUND CABLE

PART NUMBER CABLE COLLAR	d	b	e	WEIGHT KG/1000
3-SR/0304-10	10	18	24.5	7.7
3-SR/0304-11	11	18	25.5	7.7
3-SR/0304-12.5	12.5	18	27	8.1
3-SR/0304-14	14	18	28.5	8.4
3-SR/0304-16	16	18	30.5	8.5
3-SR/0304-18	18	18	32.5	8.5
3-SR/0304-20	20	23	34.5	10
3-SR/0304-22	22	23	36.5	10
3-SR/0304-25	25	23	39.5	11
3-SR/0304-28	28	23	42.5	12
3-SR/0304-32	32	23	46.5	13
3-SR/0304-36	36	23	50.5	14





P6881 – BALL JOINT

- Material Joint - nylon
 Screw - galvanized steel
 Nut - galvanized steel

Weight 0.040kg

Application: The ball joint can be fastened to the rail or to the cable support and secures the cable clips.




CABLE HALTER

- Material Cable clip - nylon
 Screw - galvanized steel
 Nut - galvanized steel

Application: The cable clips are designed to support round cables.


Note: This screw is not for clamping round cable but for fixing further cable clips. If there is no additional cable clip, the screw is removed.

PART NUMBER	d CABLE Ø	r	l	h MAX	b	c	WEIGHT (kg)
P6755	10-16	80	70	38	35	42	0.040
P6756	17-25	125	100	47	50	50	0.060
P6757	26-36	180	140	58	70	64	0.120




3.2 STEEL WIRE ROPE STEEL CARRIERS


Cable carrier system for light duty applications in working environments where dust and dirt buildup occurs. For short distances and slow moving applications.




RLD6/8 *
 * Vesconite carrier wheel
 * Flat form cable
 * width up to 25mm
 * Wire rope size 6-8mm
 * diameter
 * Weight = 0.19kg





RLS6/8 *
 * Vesconite carrier wheel
 * Round cable up to 12mm
 * diameter
 * Wire rope size 6-8mm
 * diameter
 * Weight = 0.235kg




RLD10 *
RLD12 *
 * Steel carrier wheel with
 * Anti-tip roller
 * Flat form cable
 * width up to 25mm.
 * Wire rope size 10 and
 * 12mm respectively
 * Weight = 0.52kg




RMD10 *
RMD12 *
 * Steel carrier wheel with
 * Anti-tip roller
 * Flat form cable
 * width up to 65mm.
 * Wire rope size 10 and
 * 12mm respectively
 * Weight = 0.63kg




RMSD10 *
RMSD12 *
 * Steel carrier wheel with
 * Anti-tip roller
 * Round cable-diameter
 * up to 25mm.
 * Wire rope size 10 and
 * 12mm respectively
 * Weight = 0.7kg




RMH2/10C *
RMH2/12C *
 * Heavy duty double
 * wheel carrier
 * Flat cable width up to
 * 65mm.
 * Wire rope size 10 and
 * 12mm respectively.
 * Weight = 0.9kg



3.3 MOUNTING SYSTEMS AND OTHER ACCESSORIES

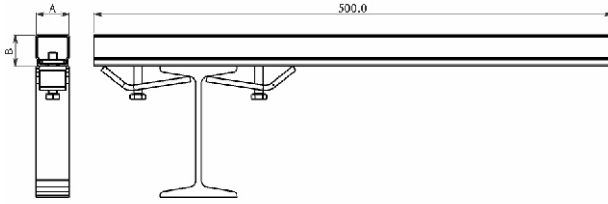


GIRDER CLAMP MOUNTS			
	A	B	
LD	32	30	M8 bolts
HD	40	36	M12 bolts

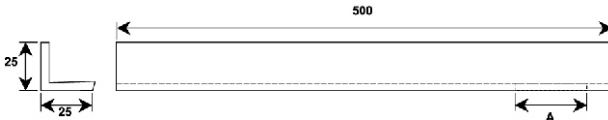


BRA25X25-LDZY: LD WELD-ON BRACKET
BRAHD30X30ZY: HD WELD-ON BRACKET

WELD ON MOUNTS		
	A	
LD	65	M8 bolts
HD	80	M12 bolts




FLAT WELD ON MOUNTS		
	A	
LD	65	M8 bolts
HD	80	M12 bolts




BRA90LDZY: 90°LD WALL MOUNT BRACKET
BRA90HDZB: 90°HD WALL MOUNT BRACKET

90° WALL MOUNTS		
	A	
LD	65	M8 bolts
HD	80	M12 bolts

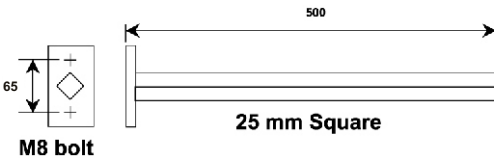

TOWING ARMS



**FLAT BAR SYSTEMS
HANGER BRACKETS
(weld on or bolt on)**

Finishes – Zinc electroplated
These are standard stock products.
Special sizes can be manufactured