


8.1 INDUSTRIAL SNATCH BLOCKS


• From 0,5 Ton to 10 Ton




	WLL	Rope Seat Ø	Rope Size
SB05	0.5t	80	>10
SB1	1t	105	>12
SB2	2t	125	>16
SB3	3t	165	>20
SB5	5t	215	>25
SB7.5	7.5t	255	>30
SB10	10t	300	>35

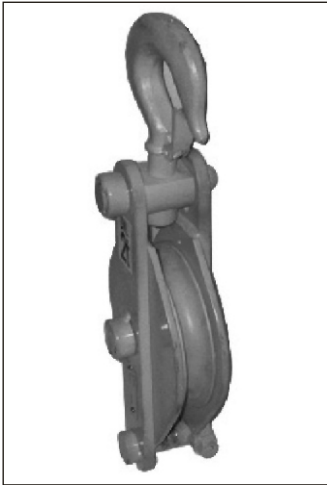

8.2 STEEL WIRE ROPE BLOCK

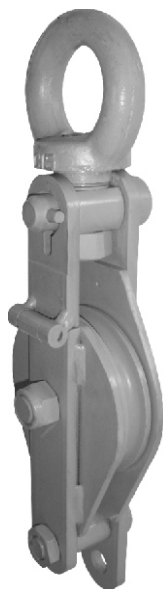


EYE TYPE STEEL WIRE ROPE BLOCK

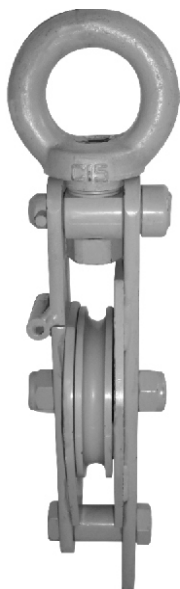


STEEL WIRE ROPE END BLOCK
(HOOK TO HOOK)

GUIDE TO SELECTION OF BLOCKS


SINGLE WHIP




DOUBLE SINGLE




TREBLE DOUBLE




SINGLE SINGLE



DOUBLE DOUBLE



TREBLE TREBLE



8.3 MANILLA ROPE BLOCK


SINGLE



DOUBLE



TRIPLE

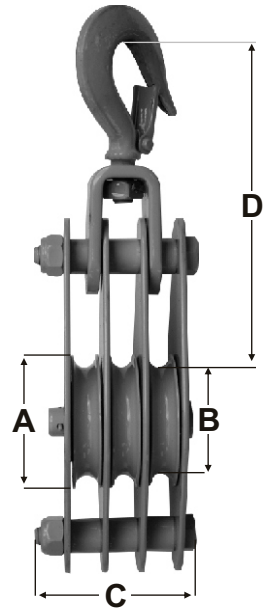

Part Number	Rope size	Seaves	Recom. WLL	SWLL on Hook	A	B	C	D	E
MRB10S	10	1	75 Kg	500 Kg	68	55	58	165	80
MRB10D	10	2	200 Kg	500 Kg	68	55	64	165	80
MRB10T	10	3	300 Kg	500 Kg	68	55	83	165	80
MRB12S	12	1	200 Kg	500 Kg	88	72	73	180	100
MRB12D	12	2	500 Kg	500 Kg	88	72	83	180	100
MRB12T	12	3	800 Kg	1000 Kg	88	72	108	190	100
MRB16S	16	1	300 Kg	500 Kg	100	80	85	183	110
MRB16D	16	2	800 Kg	1000 Kg	100	80	101	190	110
MRB16T	16	3	1200 Kg	1500 Kg	100	80	120	195	110
MRB20S	20	1	450 Kg	500 Kg	116	90	100	198	130
MRB20D	20	2	1300 Kg	1500 Kg	116	90	110	208	130
MRB20T	20	3	1800 Kg	2000 Kg	116	90	150	223	130
MRB22S	22	1	700 Kg	1000 Kg	148	118	120	226	160
MRB22D	22	2	1800 Kg	2000 Kg	148	118	138	230	160
MRB22T	22	3	2850 Kg	3000 Kg	148	118	154	238	160
MRB24S	24	1	1000 Kg	1000 Kg	TBA	TBA	TBA	TBA	TBA
MRB24D	24	2	2850 Kg	3000 Kg	TBA	TBA	TBA	TBA	TBA
MRB24T	24	3	4275 Kg	5000 Kg	TBA	TBA	TBA	TBA	TBA
MRB32S	32	1	1375 Kg	1500 Kg	TBA	TBA	TBA	TBA	TBA
MR32DT	32	2	3660 Kg	5000 Kg	TBA	TBA	TBA	TBA	TBA
MRB32T	32	3	5500Kg	7500 Kg	TBA	TBA	TBA	TBA	TBA
MRB38S	38	1	1830 Kg	2000 Kg	TBA	TBA	TBA	TBA	TBA
MRB38D	38	2	4090 Kg	5000 Kg	TBA	TBA	TBA	TBA	TBA
MRB38T	38	3	7330 Kg	7500 Kg	TBA	TBA	TBA	TBA	TBA

8.4 RUNNING OUT BLOCKS

Wheel Dia: 100mm
250mm
450mm
600 mm

For Overhead Cable Installation



RB100 - Open Hook



RB250 - Trunnion Hook



RB450 - Safety Hook



RB600 - Safety Hook

Code	Wheel Dia	Cable Seat Dia	Max Cable Dia	WLL
RB100OH/SLH	100	75	16	150 Kg
RB250SLH/TB	250	210	30	500 Kg
RB450SLH/TB	450	330	30	1000 Kg
RB600SLH	600	460	50	3000 Kg